

XMeye

For iPhone

User Manual

Part One: Acquire XMeye

Our users can acquire XMeye either through downloading from App Store or from the DVR manufacturers. Or scan the QR code to get the App.

As downloading from App Store, you may first search “XMeye”, and install it on line, as the following picture shows:



Or Scan the QR code as below to get the APP:



For Android



For iPhone

Get the App, and install it in the phone.

Part Two: Use XMeye to view real time video.

Mobile phone remote view has two ways:

- 1) Cloud login (login by user name & password)
- 2) Local login (Login by device series number).

Notes: You only can preview one device through the software.

- 1).Cloud login (login by user name & password)

a. Click XMeye Icon in the main menu, get the interface as below (Image 1):



Image 1

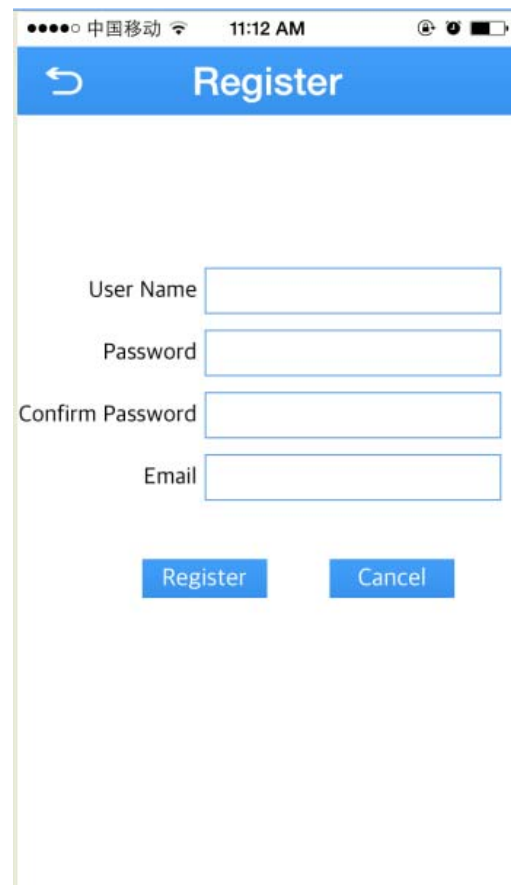




Image 2



Firstly, we need register a user. Click **Register**, enter user name, password and email, and then finish **Register**. The picture as above Image 2:

b. After register, enter user name, password, click **Cloud Login**.

Remarks:  User name can be remembered by the system.

 It will login automatically, when you open the software next time.

c. After login we will see “Device List”. Then click” +” to add device. Please see the picture as below:

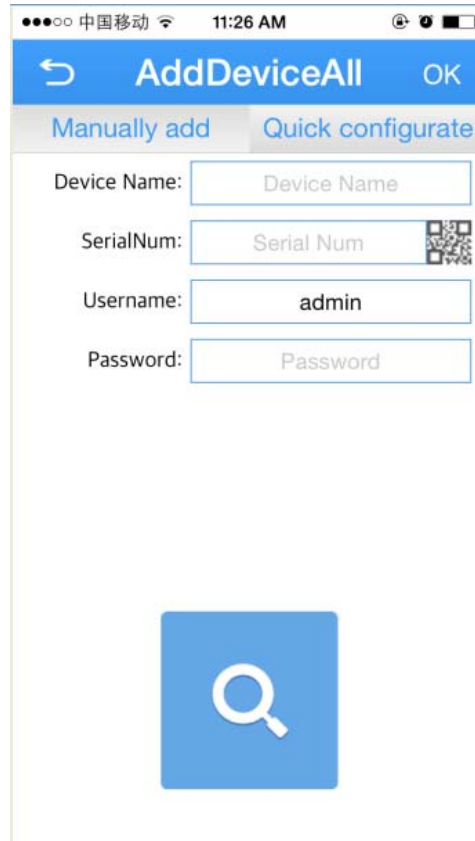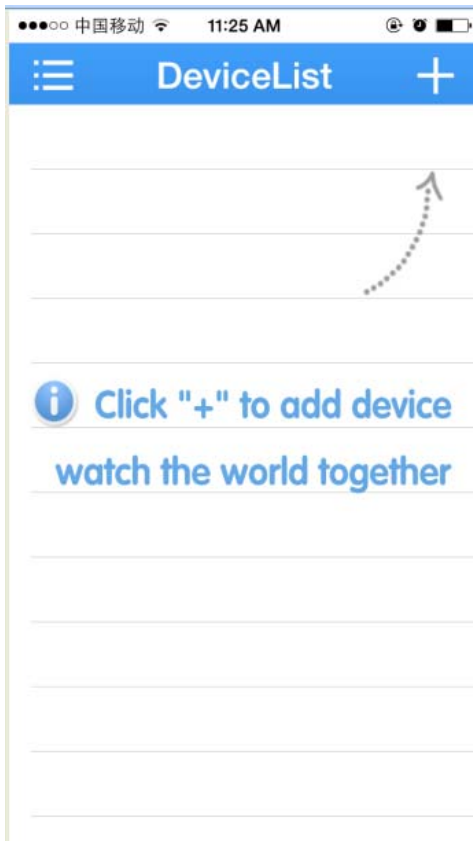


d. Enter Device Name, SerialNum, Password, Click OK to add the device.


Device Name: You can name the device as you like. For example: home

SerialNum: The serial number can be found in CMS software **Device Version** interface. Please see the picture as below.


Username: admin


Password: the default of password of the device is usually as empty (no password), if you once changed the password, just enter that password you set.

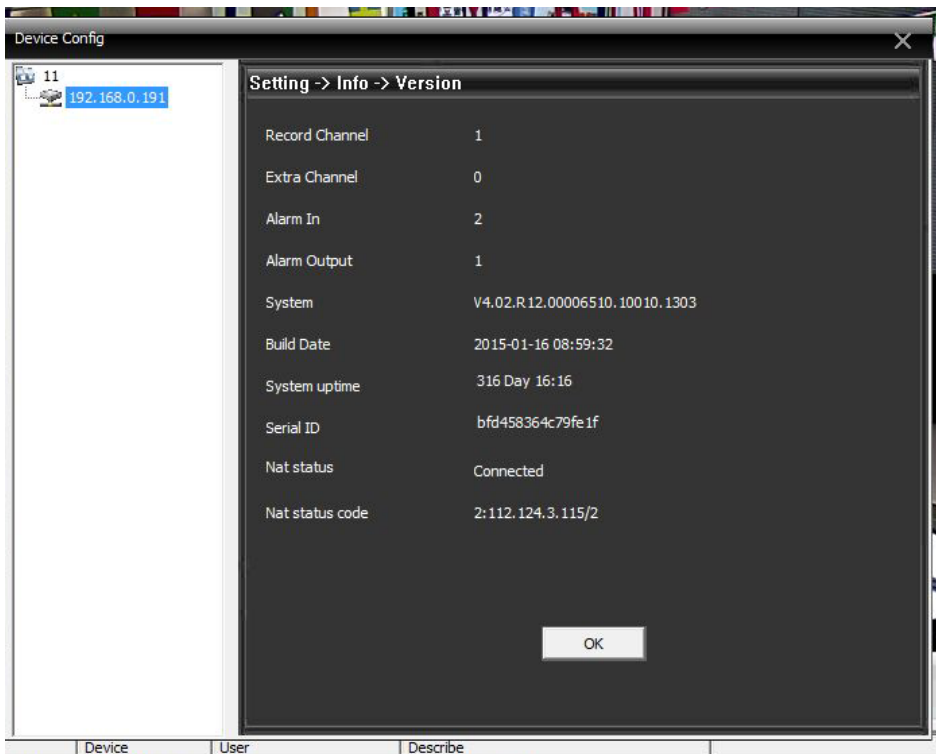

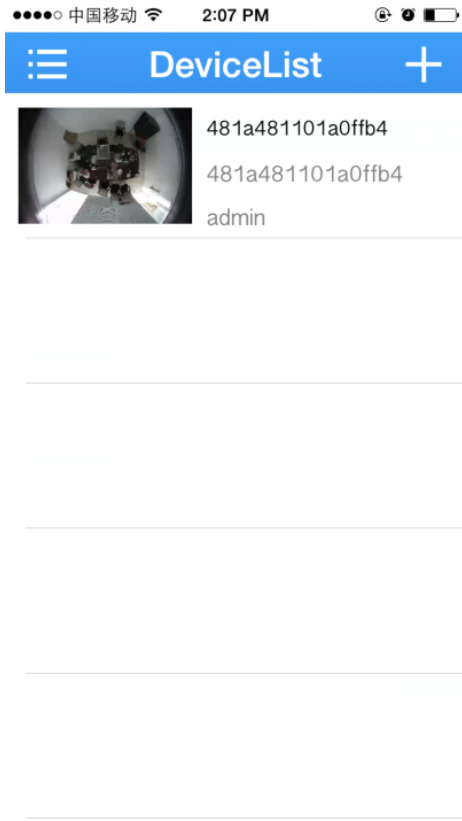

e. After adding device, under device list, can find the added serial number. You can see the serial number you added, click that, you can see the real time video.

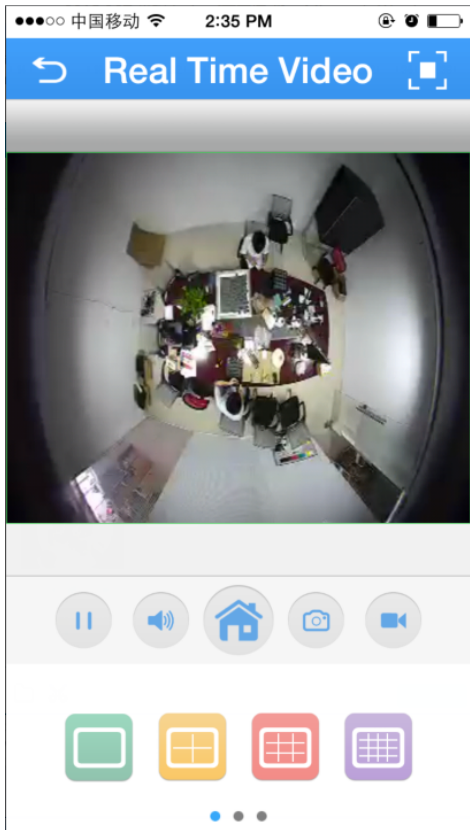

2) Or you also can search the device locally, click  to get the devices, please see as below:

中国移动

2:03 PM

☐

0fb0e1352bc73f73
34567

admin
Password

☒

481a481101a0ffb4
34567



admin
Password

Select All


Add

Cancel

Choose the device you want to monitor and click Add, add the device.

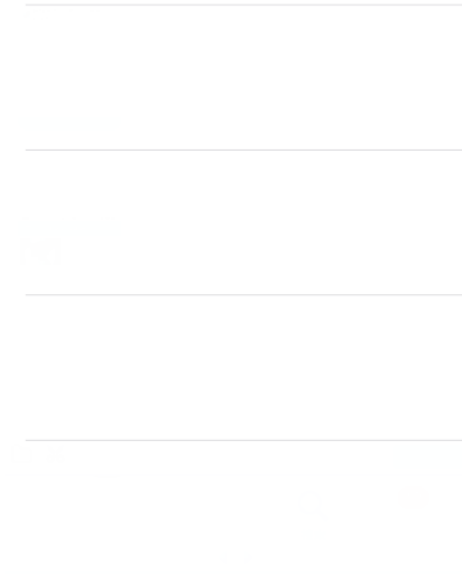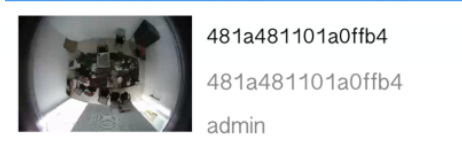


Click the series number and can see the real time video.

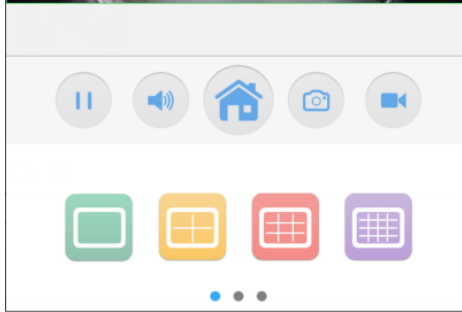


2. Local Login

- a. Click XMeye Icon

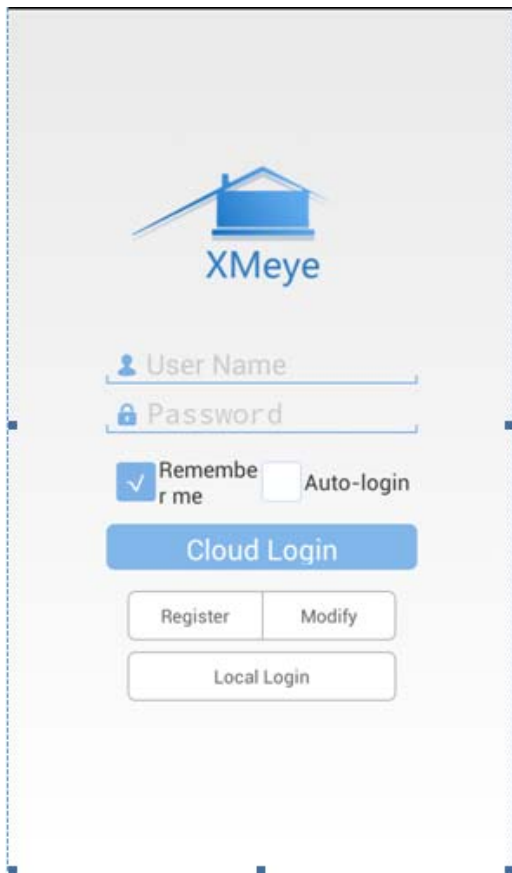


The image shows the XMeye login interface. At the top is the XMeye logo, which consists of a blue house icon with a roof and the text "XMeye" below it. Below the logo are two input fields: "User Name" with a person icon and "Password" with a lock icon. Under these fields are two checkboxes: "Remember me" (checked) and "Auto-login" (unchecked). Below the checkboxes is a blue button labeled "Cloud Login". At the bottom are three buttons: "Register", "Modify", and "Local Login".

b. Click “local Login”, can see the “Device list, click” +”

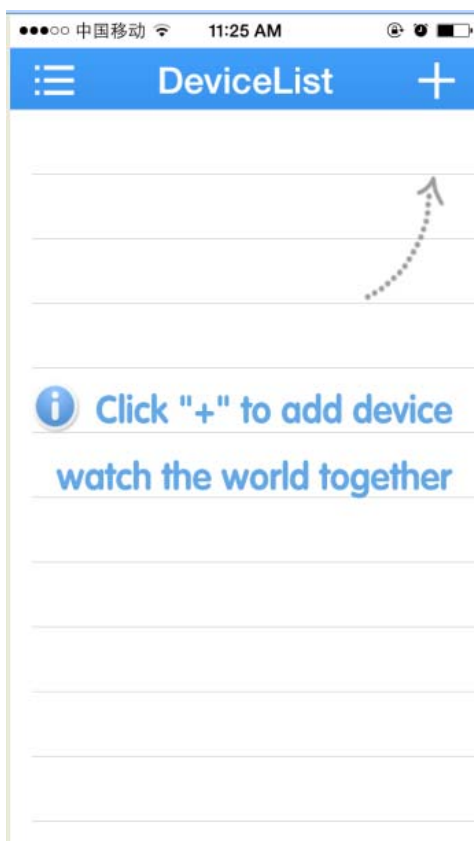

The image shows the "DeviceList" interface. At the top is a blue header bar with a menu icon, the text "DeviceList", and a "+" icon. Below the header is a list of device entries, each represented by a horizontal line. A curved arrow points from the bottom right of the list to the "+" icon in the header. Below the list is a blue information icon followed by the text "Click '+' to add device" and "watch the world together".

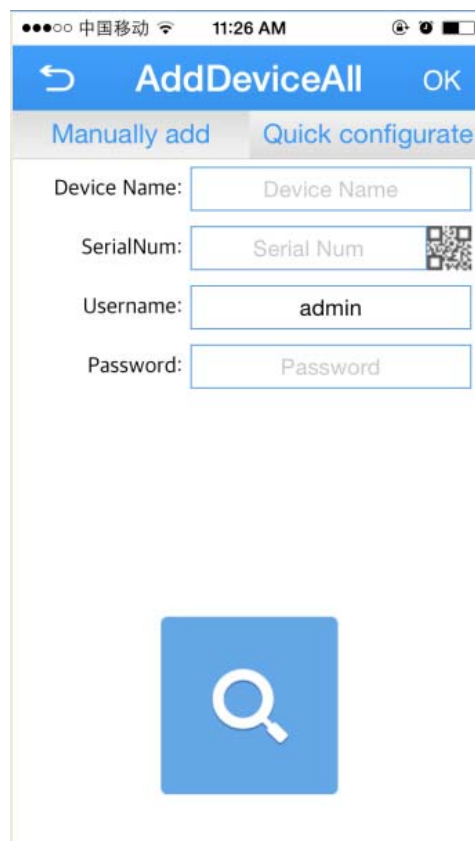

The image shows the "AddDeviceAll" interface. At the top is a blue header bar with a back arrow, the text "AddDeviceAll", and an "OK" button. Below the header are two tabs: "Manually add" and "Quick configure". Under the "Manually add" tab are four input fields: "Device Name" (placeholder: Device Name), "SerialNum" (placeholder: Serial Num, with a QR code icon), "Username" (placeholder: admin), and "Password" (placeholder: Password). At the bottom is a large blue button with a white magnifying glass icon.



Enter Device Name, SerialNum, Password, Click OK to add the device.

Device Name: You can name the device as you like. For example: home


SerialNum: The serial number can be found in CMS software **Device Version** interface. Please see the picture as below.

Username: admin

Password: the default of password of the device is usually as empty (no password), if you once changed the password, just enter that password you set.

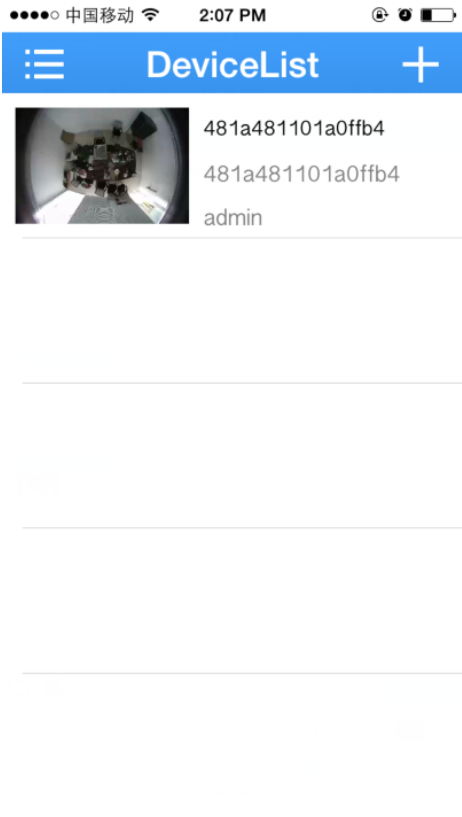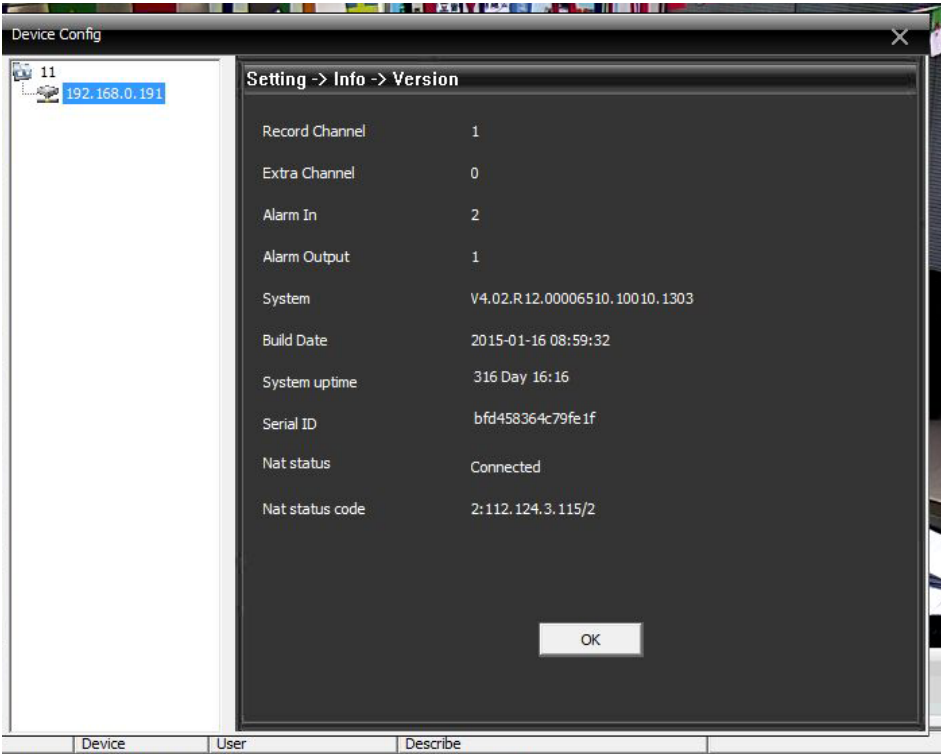


e. After adding device, under device list, can find the added serial number. You can see the serial number you added, click that, you can see the real time video.

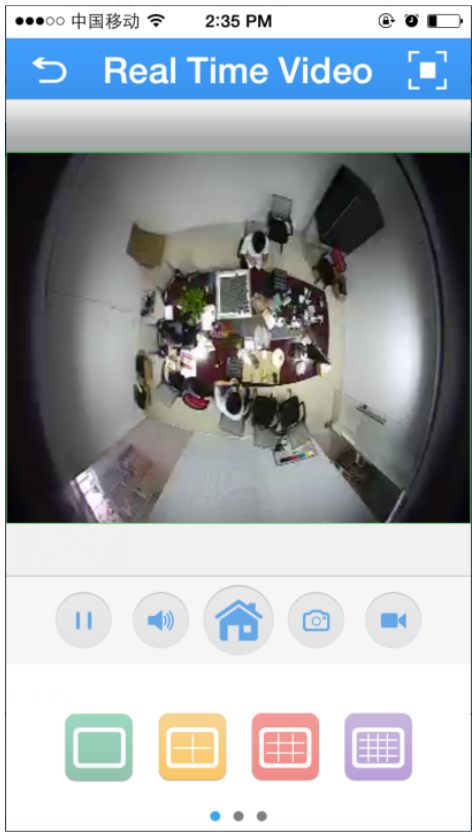

2) Or you also can search the device locally, click




to get the devices, please see as below:

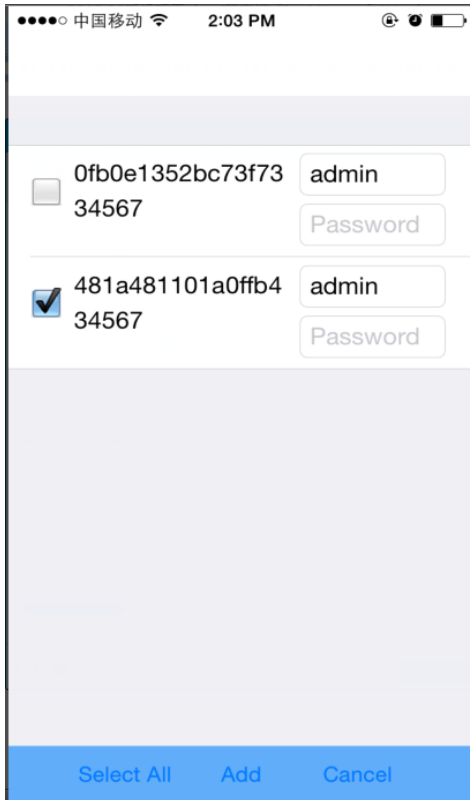

Choose the device you want to monitor and click Add, add the device.

DeviceList



481a481101a0ffb4






481a481101a0ffb4





admin

Click the series number and can see the real time video.

Real Time Video







Remarks: P2P IE view, operation method is similar as the above operation.

IE P2P view website <http://xmeye.net>